Sun Sky Lunar Multispectral Photomete

Photometer

Satellite / Meteorology / Solar / Air quality





EXPLORE THE CLIMATE



CE318-T

GLOBAL OVERVIEW

The effects of **atmospheric aerosols** at global scale on climate change and environmental evolution are critical for coming generations and the future of our planet.

To better manage their impacts, observers and decision makers need to monitor atmospheric aerosols nature and concentration to understand, alert, and forecast.


OUR SOLUTION

Cimel provides the CE318-T multispectral photometer dedicated to aerosols monitoring through the **NASA - AERONET** international network. It is recognized as the **worldwide reference** for aerosol measurements since 1992. Our historic partner, the NASA 's Goddard Space Flight Center, is the founder of the Aerosol Robotic Network (AERONET).

Main objectives

- Satellite data validation
- Satellite instrument calibration
- Validation of climate models
- Instrumental synergies
- Unique data center

Exclusive supplier of NASA AERONET 1 500 photometers worldwide

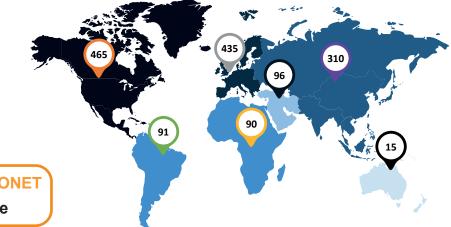


Our photometers have proven robustness and low maintenance operations. This high instrumental reliability allows to set up wide monitoring networks, even under harsh environmental conditions.

This new version provides a complete measurement of several parameters: day & night Aerosol Optical Depth (AOD), volume size distribution, refractive index and water vapour measurements which are essential for atmospheric monitoring.


The high sensitivity tracking, detection chain & data treatment ensure trustable & accurate measurements.



CE318-T + infrastructure

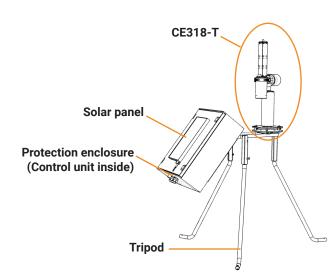

Control unit




Communication & interface

- 1: GPS antenna
- 2: Cellular modem antenna
- 3: Short range radio antenna
- 4: Display (touch buttons)

Removable terminal block


- 5: Pyranometer input 6: Rain detector
- 7: USB
- 8: Sensor head
- 9: Robot
- 10: Solar panel
- 11: External battery

APPLICATION FIELDS

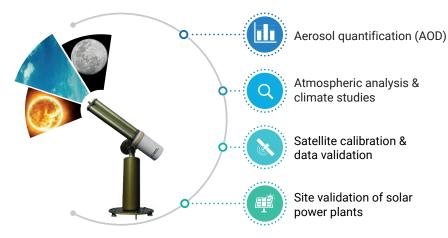

YOUR BENEFITS

- Day and night measurements
- Evolutive product with various models:
 - Standard, polarized, BRDF, BPDF, Ocean Color & Lake Color
- High calibration stability on the long term
- Large number of communication modes

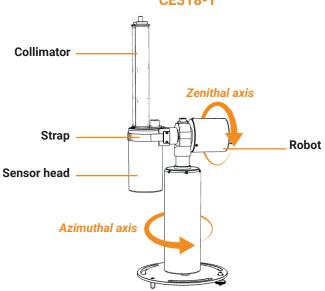











Synergy with Cimel LiDARs for vertical profiles

CE318-T

Cimel Electronique is a French manufacturer of meteorological and atmospheric observation systems for "climate - sensitive" activities

TECHNICAL PARAMETERS

| Optical Sensor Head | Half field of view | 0.63° |
|--------------------------|--|--|
| | Spectral range | 340, 380, 440, 500, 675, 870, 937, 1020, 1640 nm standard* |
| Control Unit | Communication outputs | RS232, USB, Hexa-Band (UMTS/3G/W-CDMA), GPRS |
| | Storage | Flash memory (4 MB) + SD card (32 GB) |
| | Additional measurements | Rain detector, GPS, Barometer, Temperature & Humidity sensors (inside of the protection enclosure) |
| | Additional input | Thermopile pyranometer (not supplied) |
| Robot | Azimuth range | 0°-360° |
| | Zenith range | 0°-180° |
| | Tracking precision | 0.003° |
| Software | Features: - Instruments - Settings - Data processing | Instruments setup, wavelengths selection, scan modes & scenarios configuration, measurement scheduling, data analysis, data visualization, data storage (raw data, k8, ASCII files) |
| Environmental Conditions | Temperature range | -20°C to 50°C |
| Power | Power supply | 5 W solar panel or AC supply 110 - 240 V + 2 batteries 6 V / 8.0 Ah in series as backup |
| General | Infrastructure | Tripod, with protection enclosure |
| | Packaging dimensions | Photometer: 66 x 52 x 47 cm Tripod + enclosure: 103 x 57 x 60 cm |
| | Gross weight | Photometer: 30 kg Tripod + enclosure: 21 kg |

* Other models available (see the technical datasheet)

Scan to see the datasheet







172 rue de Charonne, 75011 PARIS Phone: +33 (0)1 43 48 79 33 Email: sales@cimel.fr www.cimel.fr